



MAGNETIC SHIELDED SURFACE-MOUNT POWER INDUCTORS FASDRH SERIES

FEATURES:

Shielded Structure
Flat-top for pick and place
Low Resistance Allow high Current
Excellent Thermal Stability
Low profile

OPTIONS:

Tape & Reel is Standard
(Qty:2000pcs.)
Bulk packaging Available
for Smaller Quantities
Tolerance:K=10%,M=20% is
Standard,Tighter Tolerances Available

COMMON APPLICATIONS:

Ideal for a variety of DC-DC converter
Inductors Applications.
DC/DC converter
Power supplies for:
portable communication equipment
Camcorder
LCD,TV,PDA,PDP
Notebook computer


STANDARD SPECIFICATION:

Part Number	Inductance L(H)	DCR()							IDC(A)						
		FASDRH 0603	FASDRH 0605	FASDRH 0703	FASDRH 0704	FASDRH 1204	FASDRH 1205	FASDRH 1207	FASDRH 0603	FASDRH 0605	FASDRH 0703	FASDRH 0704	FASDRH 1204	FASDRH 1205	FASDRH 1207
1R2	1.2							0.007							9.80
2R4	2.4							0.0115							8.00
3R5	3.5	0.027						0.0135	3.0						7.50
4R7	4.7	0.031						0.0158	2.4						6.80
6R1	6.1	0.035						0.0176	3.25						6.60
7R6	7.6	0.054						0.0200	2.10						5.90
100	10	0.065	0.12	0.076	0.056	0.028	0.025	0.0220	1.70	1.35	1.68	1.84	4.50	4.00	5.40
120	12	0.070	0.13	0.098	0.06	0.038	0.027	0.0243	1.55	1.20	1.52	1.71	4.00	3.50	4.90
150	15	0.084	0.18	0.15	0.085	0.050	0.030	0.0270	1.40	1.10	1.33	1.47	3.20	3.30	4.50
180	18	0.095	0.24	0.17	0.10	0.057	0.030	0.0392	1.32	1.00	1.20	1.31	3.10	3.00	3.90
220	22	0.128	0.27	0.19	0.11	0.066	0.036	0.0432	1.20	0.91	1.07	1.23	2.90	2.80	3.60
270	27	0.142	0.30	0.23	0.18	0.080	0.051	0.0459	1.05	0.82	0.96	1.12	2.80	2.30	3.40
330	33	0.165	0.33	0.28	0.25	0.097	0.057	0.0648	0.97	0.75	0.91	0.96	2.70	2.10	3.00
390	39	0.210	0.37	0.34	0.26	0.132	0.068	0.0729	0.86	0.69	0.77	0.91	2.10	2.00	2.75
470	47	0.238	0.52	0.36	0.28	0.150	0.075	0.100	0.80	0.62	0.76	0.88	1.90	1.80	2.50
560	56	0.277	0.56	0.47	0.40	0.190	0.11	0.110	0.73	0.58	0.68	0.75	1.80	1.70	2.35
680	68	0.304	0.63	0.52	0.43	0.220	0.12	0.140	0.65	0.52	0.61	0.69	1.50	1.50	2.10
820	82	0.390	0.71	0.69	0.61	0.260	0.14	0.160	0.60	0.47	0.57	0.61	1.30	1.40	1.95
101	100	0.535	1.03	0.79	0.66	0.308	0.16	0.220	0.54	0.43	0.50	0.60	1.20	1.30	1.70
121	120	0.650	1.15	0.89	0.88	0.380	0.17	0.250	0.30	0.39	0.49	0.52	1.10	1.10	1.60
151	150	0.820	1.68	1.27	0.98	0.530	0.23	0.280	0.30	0.35	0.43	0.46	0.95	1.00	1.42
181	180	1.10	1.87	1.45	1.17	0.620	0.29	0.350	0.28	0.32	0.39	0.42	0.85	0.90	1.30
221	220	1.45	2.08	1.65	1.86	0.700	0.40	0.390	0.24	0.29	0.35	0.36	0.80	0.80	1.16
271	270	1.72	2.37	2.31	2.85	0.870	0.46	0.560	0.22	0.26	0.32	0.34	0.60	0.75	1.06
331	330	2.05	2.67	2.62	3.01	0.990	0.51	0.640	0.20	0.25	0.28	0.32	0.50	0.68	0.95
391	390	2.52	2.94	2.94	3.62		0.69	0.700	0.18	0.22	0.26	0.29		0.65	0.88
471	470	3.12	3.93	4.18	4.63		0.77	0.980	0.16	0.20	0.24	0.26		0.58	0.79
561	560	3.85	5.45	4.67	5.20		0.86	1.070	0.12	0.18	0.22	0.23		0.54	0.73
681	680	4.52	7.32	5.73	6.00		1.20	1.460	0.11	0.17	0.19	0.22		0.48	0.67
821	820	5.29	8.24	6.54	6.00		1.34	1.640	0.10	0.15	0.18	0.20		0.43	0.60
102	1000	7.22	9.24	9.44	6.00		1.53	1.820	0.08	0.14	0.16	0.18		0.40	0.55


TECHNICAL INFORMATION & CHARACTERISTICS:

SHAPE and DIMENSION

0603/0605/0703/0704

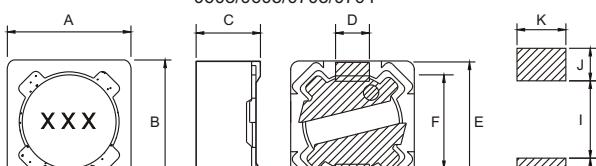

1204/1205/1207

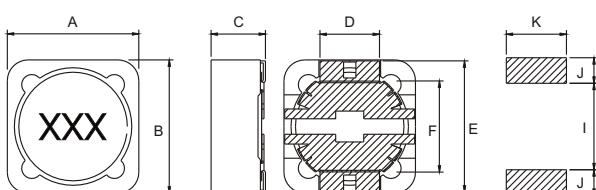

TYPE	FASDRH-0603	FASDRH-0605	FASDRH-0703	FASDRH-0704	FASDRH-1204	FASDRH-1205	FASDRH-1207
A	6.5Max	6.5Max	7.5Max	7.5Max	12.3Max	12.3Max	12.3Max
B	6.5Max	6.5Max	7.5Max	7.5Max	12.3Max	12.3Max	12.3Max
C	3.0Max	5.0Max	3.4Max	4.5Max	4.5Max	6.0Max	8.0Max
D	1.5	1.5	1.8	1.8	5.0	5.0	5.0
E	6.6	6.6	7.2	7.2	11.8	11.8	11.8
F	4.6	4.6	5.4	5.4	7.6	7.6	7.6
I	4.6	4.6	4.8	4.8	7.0	7.0	7.0
J	1.4	1.4	1.5	1.5	2.8	2.8	2.8
K	1.9	1.9	2.2	2.2	5.4	5.4	5.4

Test Equipment and Conditions

Inductance is measured with HP-4284A LCR meter or equivalent.
Maximum allowable DC current is that which causes a 25%
inductance reduction of the initial value, or coil temperature to rise
by 40 °C, whichever is smaller.(Reference ambient temperature 20 °C)
Operating temperature:-25 ~+85 °C