慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

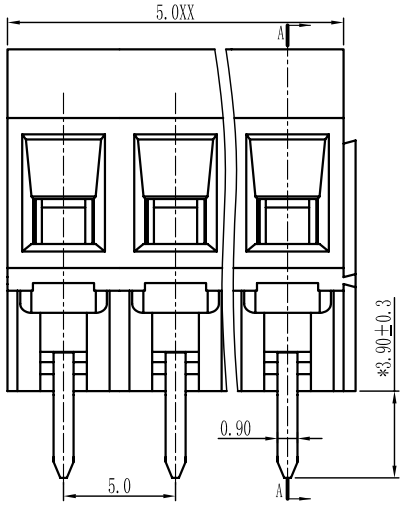

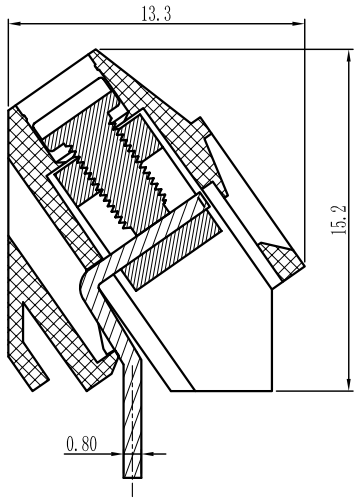

SECTION A-A

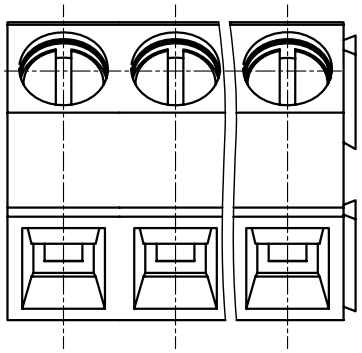



电 气 性 能/Electrical

参考标准/Standard: UL IEC
额定电压/Rated voltage: 300V 250V
额定电流/Rated current: 10A 24A
接触电阻/Contact resinstance: 20mΩ
使用线径/Wire range: 24-12AWG 2.5mm²
耐电压/Withstanding voltage: AC2000V/1Min
绝缘电阻/Insulation resistance: 500MΩ/DC500V

机 械 性 能/Mechanical

温度范围/Temp.Range: -40° C~+105° C
扭 矩/Torque: 0.4Nm(3.51b`in)
剥线长度/Strip length: 6-7mm

尺 寸/Dimensions

间 距/Pitch: 5.0mm
极 数/Poles: 2P-24P

材 质 及 电 镀/Material

塑 件/Housing: PA66,UL94V-0
螺 丝/Screws: M2.5,steel Zinc plated
方 块/Cage: Brass,Ni plated
焊 脚/Pin header: Brass,Snle plated

订 购 方 式 :
HOW TO ORDER

□□ - □ □ P - □□□ - 客户需求 Custmor Request (X X X)

- □□ 型号/Model
- □ 极数/POLE
- □ 0.未定义/No definition; 1.单间距/Sing pitch; 2.双倍间/Double pitch
- □□□ 灰色/Grey 10; 蓝色/Blue 20; 黑色/Black 30; 绿色/Green 40; 橙色/Orange 50; 红色/Red 60; 透明/Transparent 70; 黄色/Yellow 80; 白色/White 90

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		short angle sid					—	▱	//	⊥
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	over 6 to	to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	比例	第一视角/FIRST ANGLE PROJECTION
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称/NAME: WJ103-XXP-1YY-00A