

REV.	DESCRIPTION	DATE
A	RELEASE	Apr 21,2004
B	04'0618	Jun 12,2004
C	05'0435	Apr 12,2005
D	06'0212	Feb 11,2006
E	06'1233	Dec 29,2006

MATERIALS

- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
- COVER : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY(t=0.20mm), GOLD PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAILS.

SPECIFICATION

- CURRENT RATING : 1.0 A. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
- CONTACT RESISTANCE : 30mΩ MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.






ORDER INFORMATION:

5190006-XXX-R

SERIES CODE: SMT FEMALE
 NUMBER OF POSITIONS: 6

ROHS FOLLOW NUMBER
 07: TUBE PACKAGE
 08: TAPE&REEL PACKAGE



CONTACT PLATING:
 0: GOLD FLASH
 2: 10u" GOLD

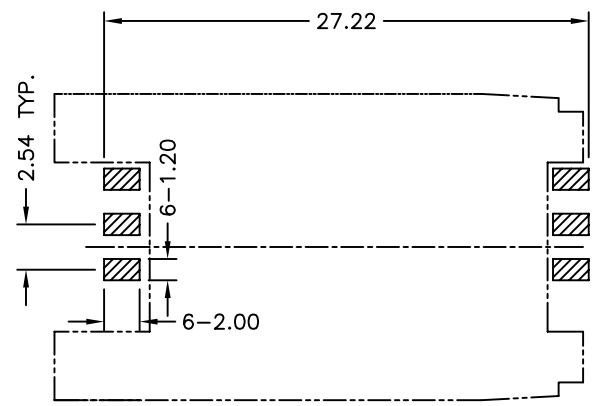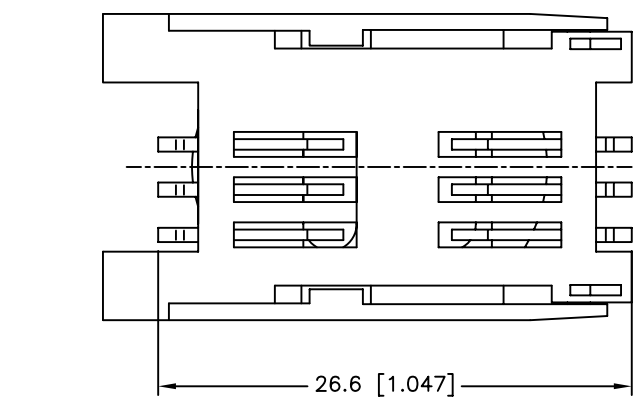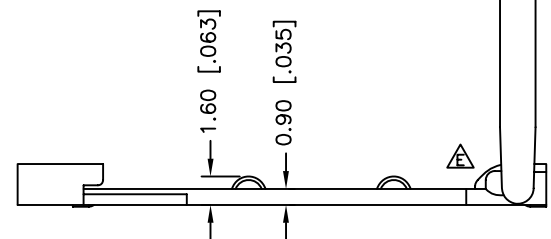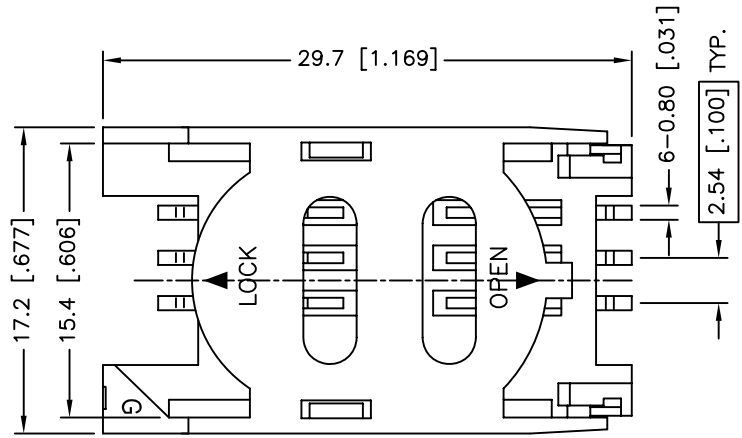


RECOMMEND P.C.B. LAYOUT
 TOLERANCE ± 0.05
 TOP VIEW

TOLERANCE .0=±.25 [.010] .00=±.15 [.006] .000=±.05 [.002] .0000=±. ANG.=±3°		DRAWER <i>yun</i> CHECK <i>Eric</i> APP'D <i>Wisely</i>		 ASTRON TECHNOLOGY CORP. NAME 2.54PH SIM CARD SMT 6PIN (ROHS)	
UNITS : mm [inch]		PRODUCT SPEC.			
SCALE NONE	SIZE A4	SHEET 1 OF 2	REV. E	DRAW NO. R5190006-X07(8)	

REV.	DESCRIPTION	DATE
A	RELEASE	Apr 21,2004
B	04'0618	Jun 12,2004
C	05'0435	Apr 12,2005
D	06'0212	Feb 11,2006
E	06'1233	Dec 29,2006

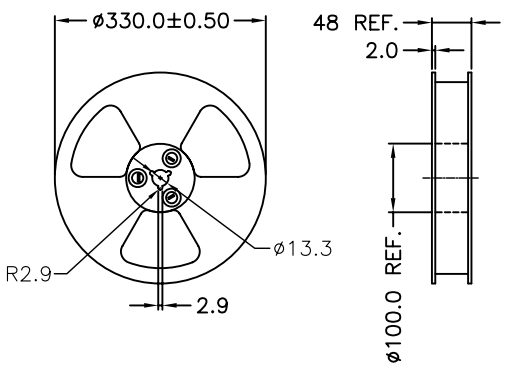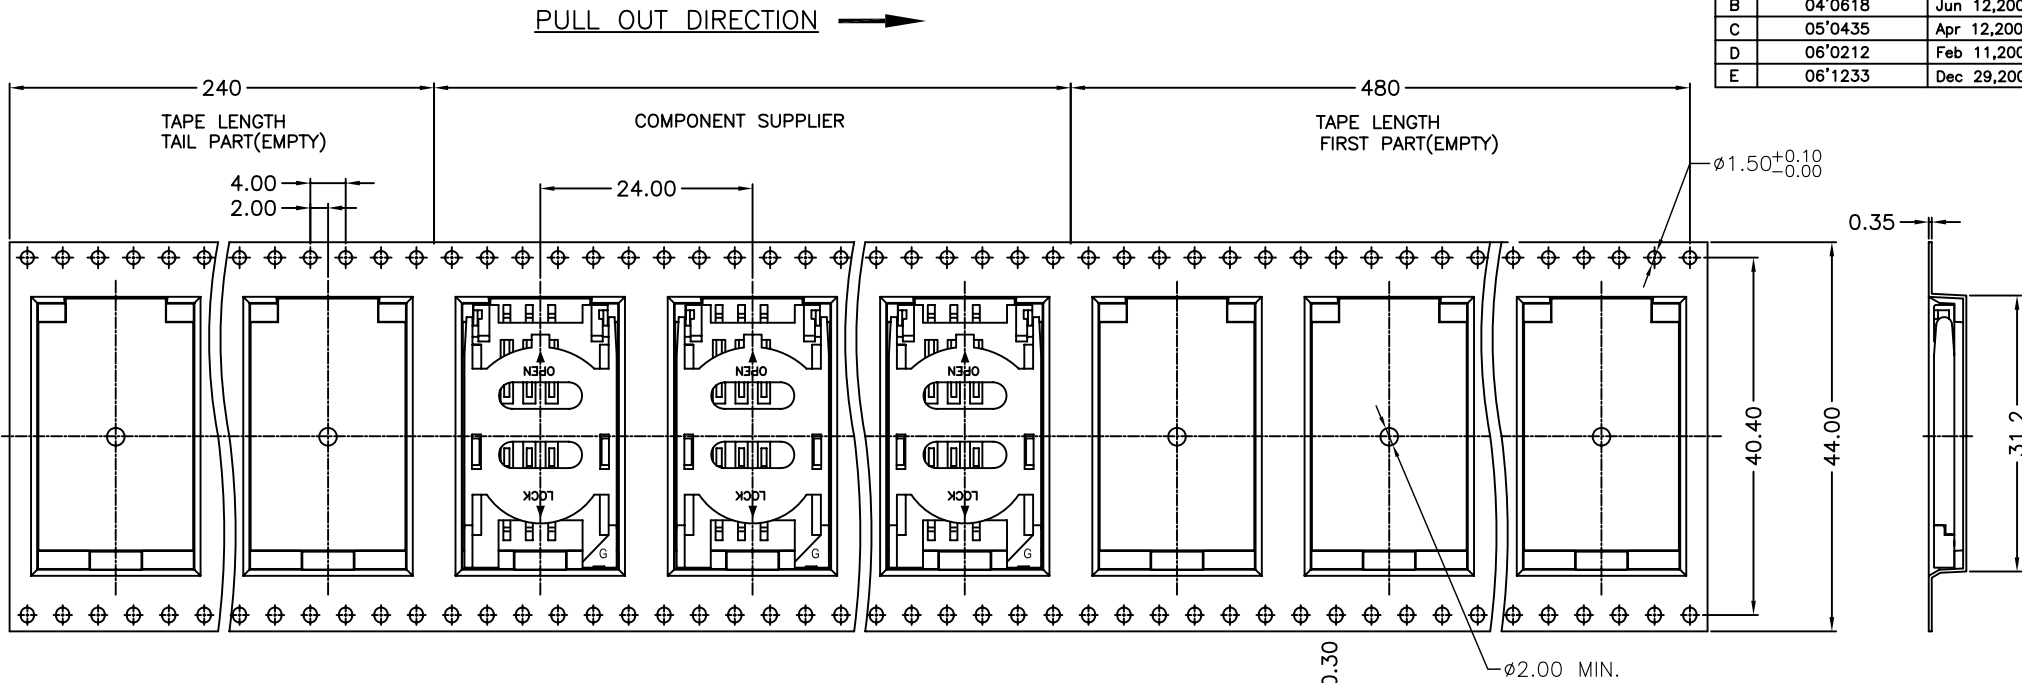

REEL FOR CARRIER TAPE

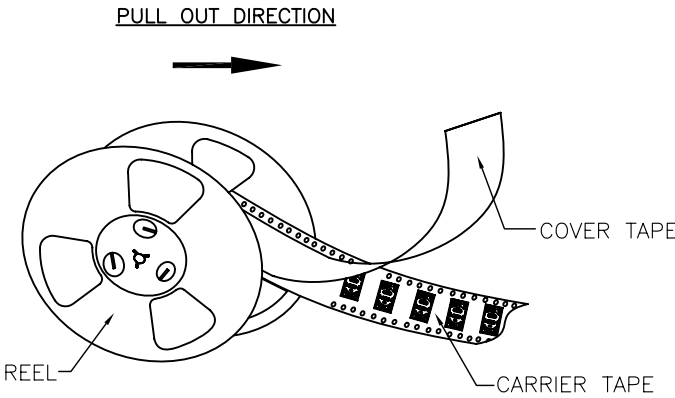

TAPE & REEL PACKAGE :

MATERIALS

1. CARRIER TAPE: POLYSTYREN (PS)
2. COVER TAPE: POLYSTYREN (PS)
3. REEL: POLYSTYREN (PS)

QUANTITY

1. 650PCS PER REEL
2. 6 REEL PER CARTON(3900PCS PER CARTON)

TOLERANCE	
.0=±0.30	
.00=±0.10	
.000=±0.05	
ANG.=±3°	

DRAWER <i>yun</i>
CHECK <i>Eric</i>
APP'D <i>Wisely</i>
PRODUCT SPEC. —

Astron	
ASTRON TECHNOLOGY CORP.	
NAME	2.54PH SIM CARD SMT 6PIN (ROHS)
DRAW NO.	R5190006-X07(8)

UNITS : mm [inch]

SCALE NONE	SIZE A4	SHEET 2 OF 2	REV. E
---------------	------------	-----------------	-----------